



For everyone



PC850

PC-based automatic screening audiometer

The leading PC-based audiometer that provides a customized and flexible solution for all screening audiometry requirements within occupational health and safety critical roles. Proven to provide a streamlined and efficient hearing conservation program.

Comprehensive testing

The PC850 is a reliable choice for occupational health professionals who require a vast range of screening modes. It includes automatic (computer / Békésy) and manual operation options to measure and assess hearing thresholds in accordance with safety critical hearing standards.

It also has configurable options so the test can be customized to the users' specific requirements, ensuring accurate and efficient testing. Designed to connect directly to a PC or as a stand-alone manual audiometer.

Test assessment and management

The supplied Audibase PC software offers custom built educational tools with a predictive hearing level and hearing loss indicator, providing a clear explanation to test subjects, and enabling a greater level of assessment. All tests can be automatically categorized in accordance with HSE standards.

Portability

Compact and lightweight at only 1.56lbs, the PC850 is completely portable, making it ideal for both clinic and mobile audiometry use.

EMR connectivity

Offering seamless PC connectivity, the PC850 includes our Audibase data management software, allowing all test results to be stored and available for future review in a single application.

Extensive data and trend analysis provides business intelligence to support the delivery of a successful hearing conservation program and identify at risk individuals.

The PC850 can also be interfaced to a number of leading OH Electronic Medical Record (EMR) systems to provide a paperless and seamless health screening program that maximises workflow efficiencies.

Key features

Automatic and manual test modes (inc. Békésy test)
HSE categorization
Unique educational and assessment tools
Extensive data analysis and trending
Communication channel
Third-party EMR connectivity
Intuitive and ergonomic design
Compact, lightweight and portable



Visit www.amplivox.com/audiometry/pc850 to learn more about the features and benefits of the PC850

www.amplivox.com | 888 941 4208 | hello@amplivox.com

PC850

PC-based automatic screening audiometer

Technical specifications

Air conduction audiometry

Frequency range (kHz):	0.25, 0.5, 1, 1.5, 2, 3, 4, 6, 8
Frequency accuracy:	<1%
Distortion:	<2%
Output level range:	-10dBHL to 100dBHL $\pm$ 3dB
Output level step size:	Békésy: 2.5dB Computer: 5dB Manual: 5dB
Test method:	Manual and automatic audiometry PC controlled, Békésy, Computer (Hughson Westlake, BS6655)
Threshold level:	Békésy: 1dB, Computer: 5dB Manual: 5dB

Communication

Talk over:	Integrated
------------	------------

System requirements (PC operated)

Operating system:	Stand alone PC with Windows 10 or higher
Memory:	Internal memory and available disc space as required by the PC operating system
Software:	Available via website download
Connectivity:	USB

Physical data

Graphic display:	2 lines of 24 characters
Power:	Mains: 240Vac 50/60Hz
Dimensions (L x W x H):	9.9 x 6.6 x 2.5in
Weight:	1.58lbs

Safety and standards

Type:	Audiometer Type 4
Safety:	IEC 60601-1 (plus UL, CSA & EN deviations)
EMC:	IEC 60601-1-2
Performance:	Type 2 (IEC 60645-1:2017), Type 3BE (ANSI S3.6:2010)
CE Mark:	Complies to EU Medical Device Regulation (MDR 2017/745)


Standard equipment

- Standard audiometric headset
- Subject response switch
- Power supply with country adaptors
- Carry case
- Manual & software (available via website download)
- USB cable PC connection)

Optional equipment

- Amplivox Audiocups (noise-reducing enclosures)
- Ear cushion covers (Audiocup or standard type)
- ER-75 electro acoustic ear simulator
- Power Bank USB cable
- Audiology booth
- Booth leads

Additional information

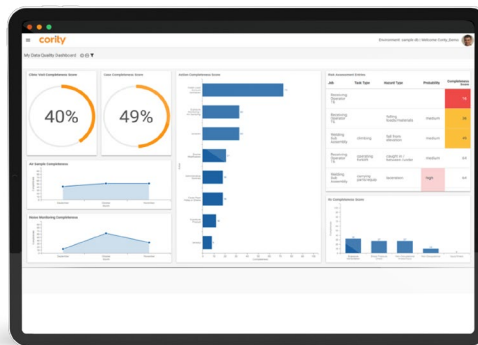

Cority API

Working in partnership, Amplivox and Cority are proud to introduce the first audiometry REST API which supports a direct and secure connection between Cority software and Amplivox audiometers with no subject data stored on the local PC drive.

This seamless connection supports proven workflow improvements through the reduction of test times and the elimination of paperwork, allowing for a greater level of subject care to be provided.



Amplivox Ltd, 10393 West 70th Street
Eden Prairie, MN 55344, United States
www.amplivox.com | 888 941 4208 | hello@amplivox.com

The Amplivox policy is one of continuous development and consequently the equipment may vary in detail from the description and specification in this publication.